


XQY-PS4-0.7/3-NE

精密高频功分/合路器

precision RF power splitter/Combiner

参数/Parameters	规格/Specifications
频率范围 Frequency Range	700 ~ 3000 MHz
插入损耗 Insertion Loss	≤ 1.0 dB (Excluding theoretical loss 未含理论损耗 6.0 dB)
输入驻波 Input Port VSWR	≤ 1.28
输出驻波 Output Port VSWR	≤ 1.18
隔离度 Isolation	≥ 20dB
幅度平衡 Amplitude Balance	≤ 0.3dB
相位平衡 Phase Balance	±4°
阻抗 Impedance	50 Ohms
端口接头 Input/Output Connectors	N-Female
承受功率 Power Rating	Splitter 分路器用时 30W; Combiner 合路器用时 2W
工作温度 Operation Temperature	-35°C ~ +75°C
表面处理 Surface Finishing	喷砂本导
外形尺寸 Outline Dimensions	101.1*75.1*19.1 (mm)
重量 Weight	334 (g)

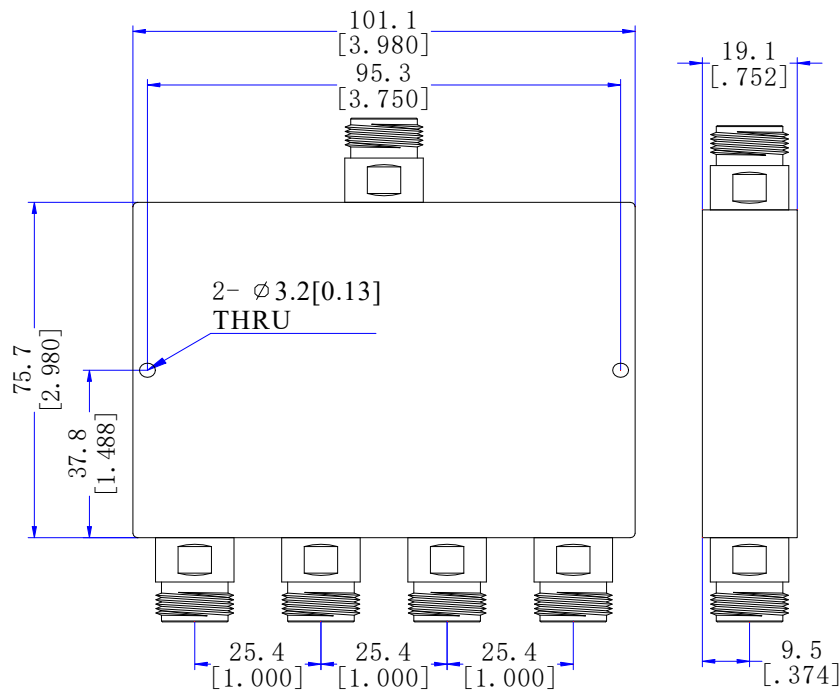

注: 尺寸(mm/[英寸]), 一般公差(± 0.3)

Note: Dimensions (mm / [inch]), General tolerance (±0.3)